



RG15

www.arcaudio.com


**2015+ ROAD GLIDE®
AMPLIFIER MOUNTING BRACKET**

INSTALLTION GUIDE
FOR 2015+ HARLEY DAVIDSON® MODELS
ROAD GLIDE® AND ROAD GLIDE ULTRA®



1. Remove the stock radio. The amplifier will be located upside down beneath the radio.

Remove the 4 Allen screws holding the radio in place. Disconnect all the plugs and harnesses from the rear.

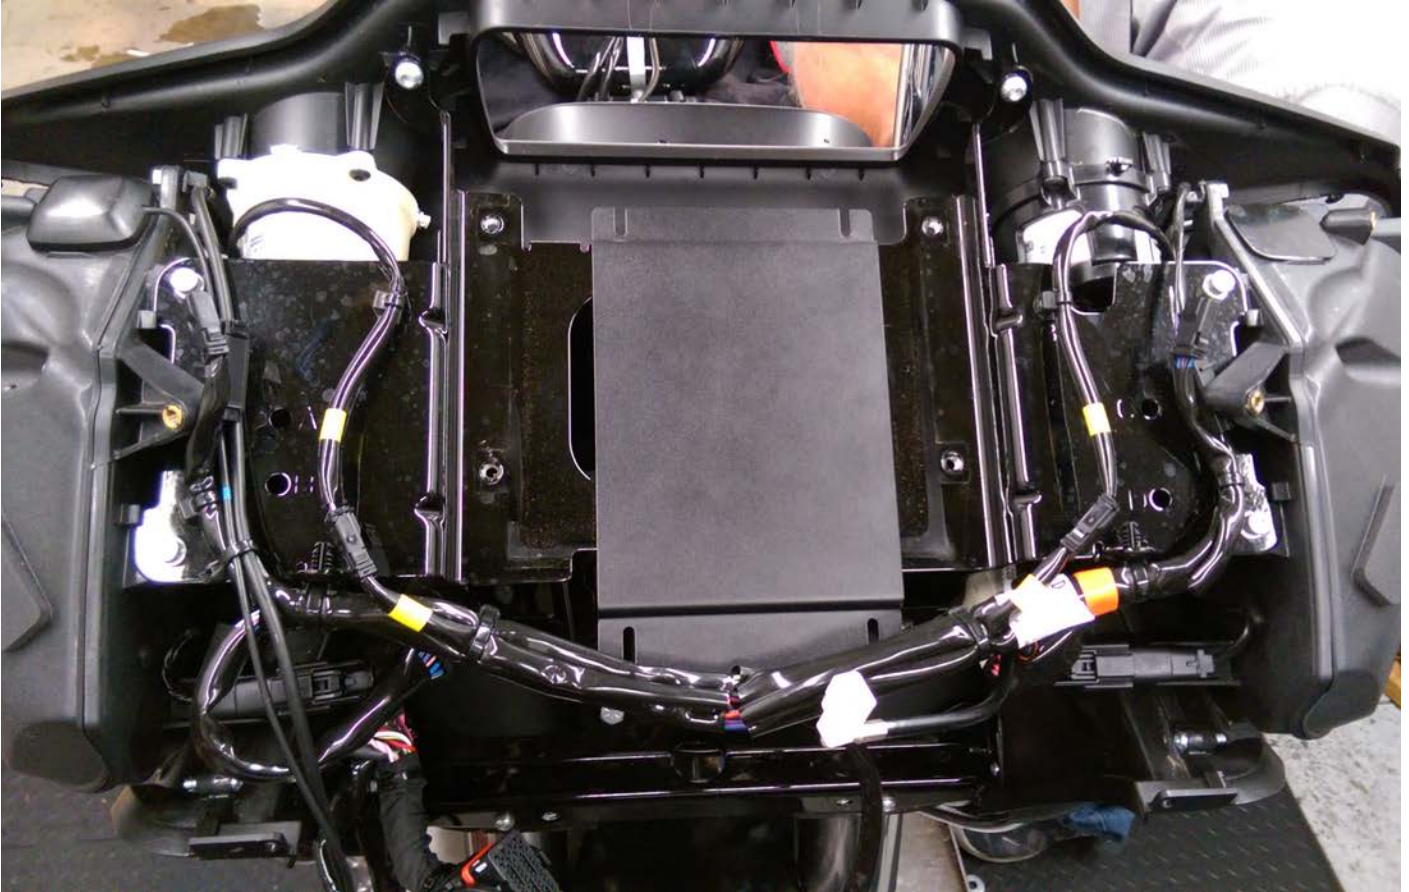

2. With the radio removed, you will see a large, black, steel bracket that is the main support for the fairing. The amplifier mounting place will lay on top of this support so that is it held in place by the radio when it is reinstalled.


Note: The short tab of the mounting bracket faces the rear of the bike closest to the gauges.

Wrong



Wrong



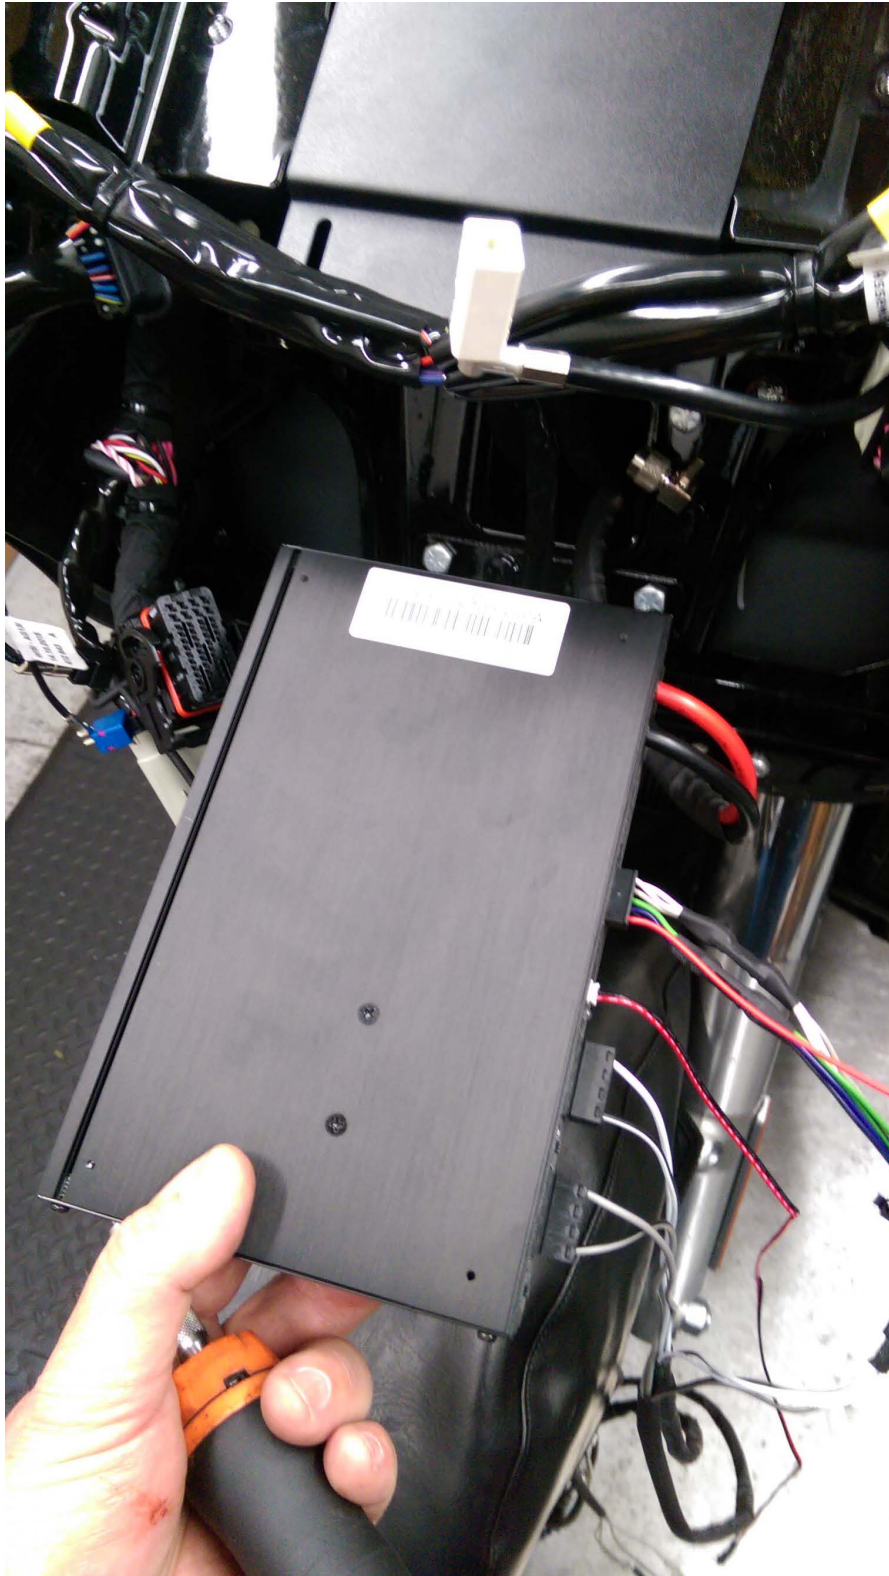


3. By now the amplifier should be completely wired and tuned. You will not be able to make any adjustments after this point without removing the amplifier. If needed temporarily reconnect the radio and test the system.

The amplifier inserts under the structural members of the fairing, directly behind the headlight.




4 Secure the amplifier to the bracket using the provided screws and washers. Some Blue Locktite® would be a good idea here.




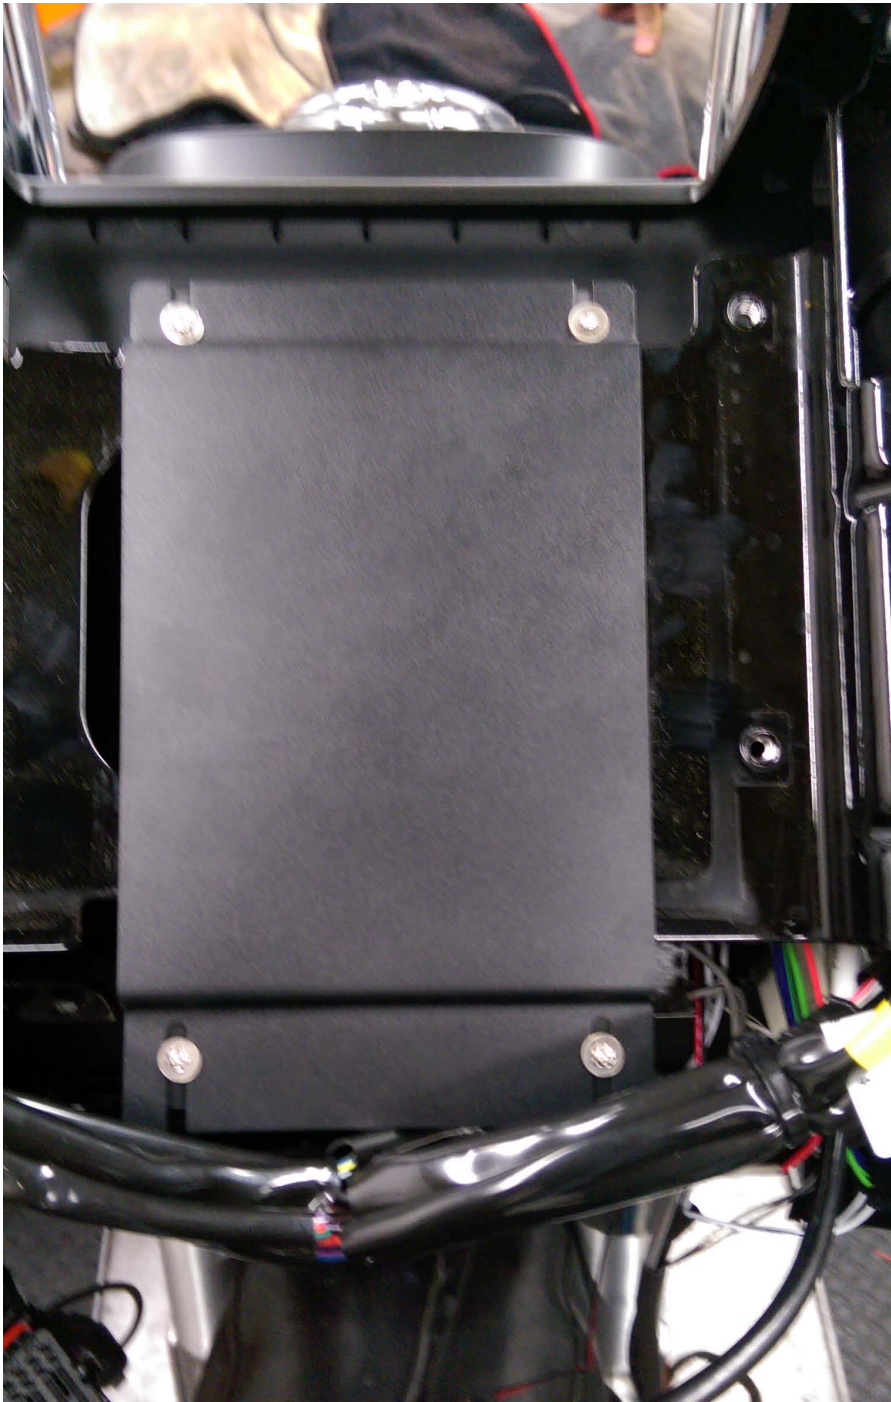

5.The final amplifier installation should look something like this.

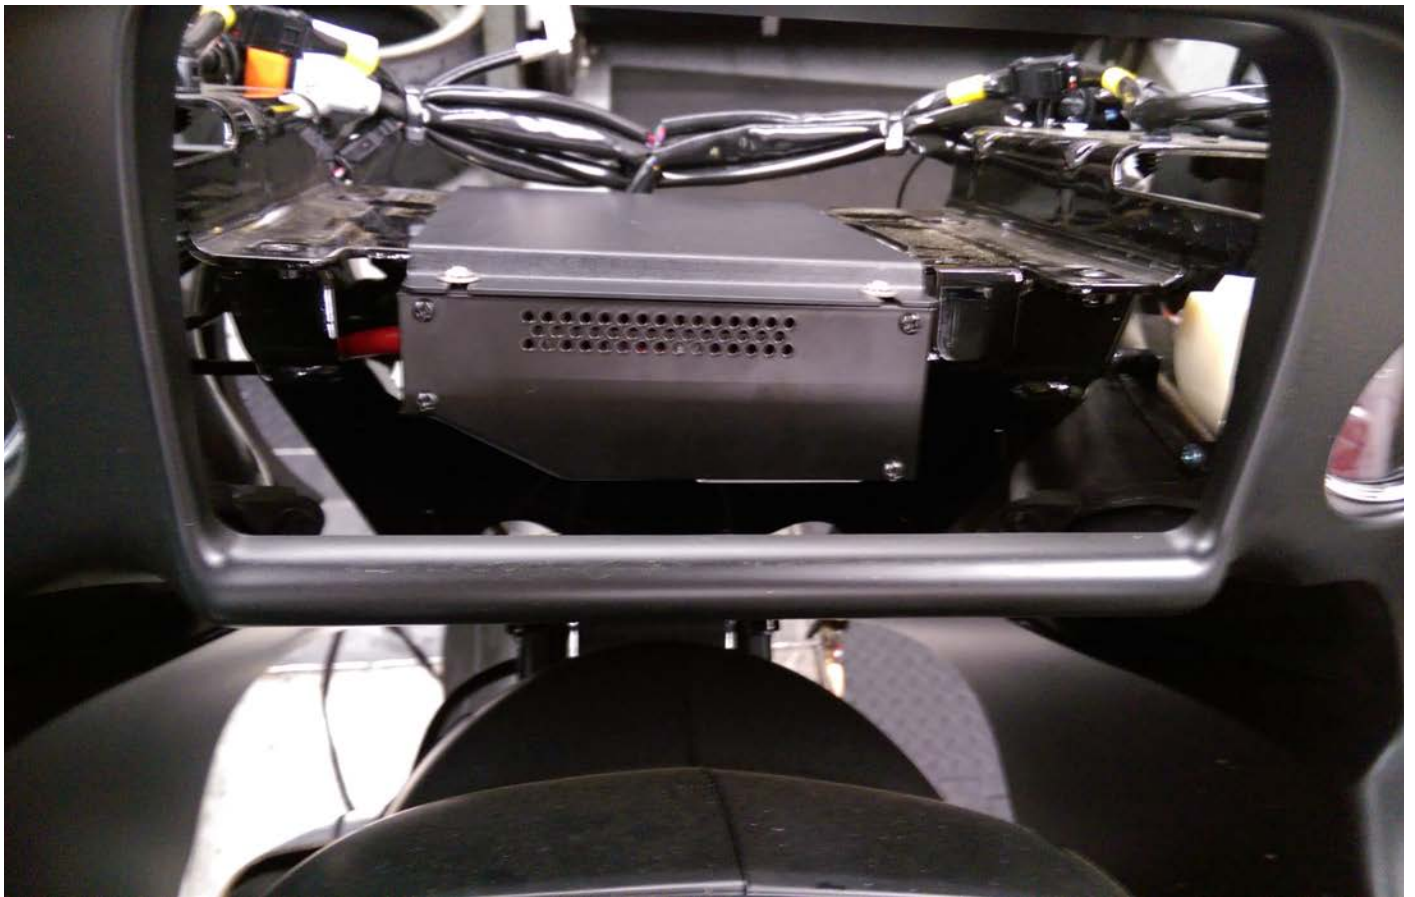

6. Looking through the opening for the radio, you can see the wiring exits on the left hand side (clutch level side). The steel structure around the amplifier is shaped perfectly to accept it with all the correct angles to provide clearance. Now would be a good time to insure the wiring is secure and will not abrade on anything metal.

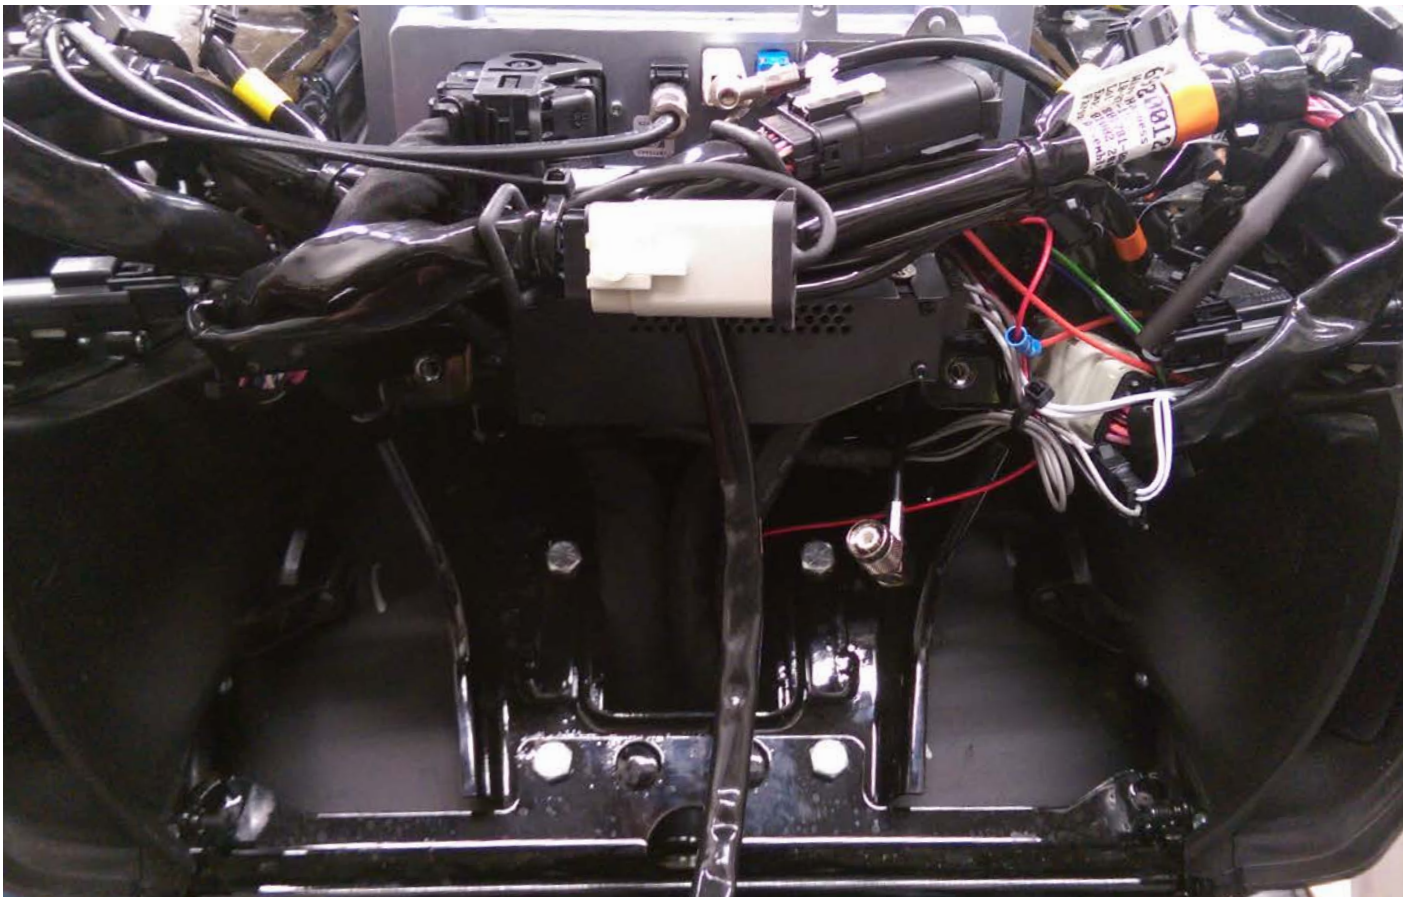

7. With the radio reinstalled and connected the finished amplifier installation should look like this. Make sure you have all the connections at the radio correct, fully seated and tightly secured. The system should now be ready for a final system check.